

BALT5-1300ACTD

LOW PROFILE T5 FLUORESCENT EMERGENCY BALLAST 1300 LUMENS



LED Test switch included.

STANDARD



ILLUMINATION

- Works with or without an AC ballast to convert new or existing fluorescent fixtures in to unobtrusive emergency lighting.
- Operates one lamp in the emergency mode for a minimum of 90-minutes.
- Provides a maximum initial lumen output of 1300 lumens.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 8.4V long life, maintenance-free, rechargeable sealed NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to fluorescent lamp for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- AC output ensures compatibility with newer lamp technologies and helps prolong lamp life.
- Time delay enhancement to overcome end-of-life circuit protection.

MOUNTING

- Suitable for installation inside, on top or in remote* of the fixture.
- Can be used in both switched and unswitched fixtures.
- UL Listed for factory or field installation.

HOUSING


- Low profile galvanized steel construction.
- Compact design fits most fluorescent fixtures.

WARRANTY / LISTING


- Five year warranty against defects in material and workmanship (lamps excluded).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

LAMP COMPATIBILITY

- Compatible with most one-, two-, three-, and four-lamp electronic standard and dimming AC ballasts.
- Operates one T5, T5HO, T8, T12, Circular T5/T9, U-bend T8/T12, 4-Pin CFL and long CFL lamps in emergency mode. Refer to the chart below for a complete list of compatible lamps.

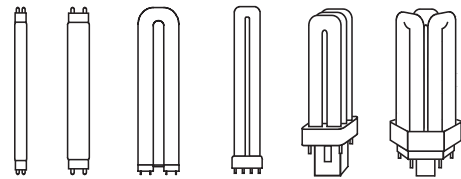

DIMENSIONS



LAMP COMPATIBILITY CHART

LAMP	INITIAL LUMENS	LAMP	INITIAL LUMENS	LAMP	INITIAL LUMENS
	1-LAMP		1-LAMP		1-LAMP
T5 14W	700	T8 32W	1100	4-Pin Long CF 18W	925
T5 21W	850	T12 20W	900	4-Pin Long CF 24W	950
T5 28W	1100	T12 40W	1200	4-Pin Long CF 36W	1025
T5HO 39W	1200	4-Pin PL CF 13W	800	4-Pin Long CF 40W	1050
T5HO 54W	1300	4-Pin PL CF 18W	950	4-Pin Long CF 50W	1100
T8 17W	950	4-Pin PL CF 26W	975		

* When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.

EMERGENCY BACKUP

BALT5-1300ACTD