





## APPLICATION

BEST

For use with lighting equipment, communications and electrical equipment, emergency lighting equipment and fire alarm & security systems.

BEST

BEST

BEST

## **FEATURES**


- Valve-regulated and safe to discharge in any position.
- Completely sealed and maintenance free, low selfdischarge.
- Impact-resistant ABS housing.

BEST

- Will last up to 5 years in standby applications and 200 to 1,000 cycles in cyclic applications depending on depth of discharge.
- Available in a variety of sizes and amp ratings.
- Provides reliable power output in a variety of applications, resulting in greater efficiency and improved ability to recover from deep discharge.
- Cycle or standby use.
- Low resistance safety feature makes the batteries easy to recharge & maximizes energy output.
- Standard F1 or F2 "flat lugs" type terminal.

## WARRANTY / LISTING

Batteries are prorated for 2 years.

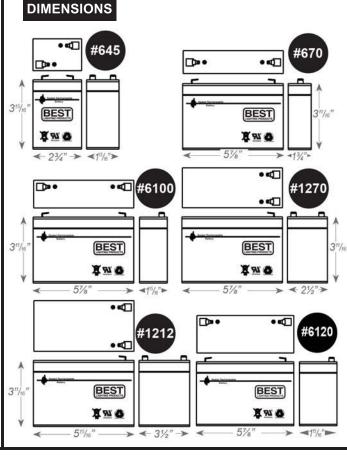

## **ORDERING INFORMATION**



MODEL	NOMINAL VOLTAGE	NOMINAL CURRENT	WEIGHT
BL645	6 Volts	4.5 Amp-Hr	1.6 lbs
BL670	6 Volts	7.0 Amp-Hr	2.4 lbs
BL6100	6 Volts	10.0 Amp-Hr	3.4 lbs
BL6120	6 Volts	12.0 Amp-Hr	4.0 lbs
BL1212	12 Volts	12.0 Amp-Hr	8.4 lbs
BL1270	12 Volts	7.0 Amp-Hr	4.9 lbs

Sample Part Number: BL645