

# CWLXTE

## WET LOCATION LED EXIT SIGN & INCANDESCENT EMERGENCY POLYCARBONATE COMBO



### STANDARD



### OPTIONAL



COMBOS

CWLXTE

### ILLUMINATION

- Two fully adjustable 5.4 watt, glare-free incandescent lamp heads.
- High performance reflector and tempered glass lens for optimal light distribution.
- Ultra bright, energy efficient, long life Red or Green LED EXIT sign illumination.

### ELECTRICAL

- Dual 120/277V.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 6V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- Mounting hardware provided for back surface wall mount.

### HOUSING

- 5VA flame retardant, UV-stabilized polycarbonate gray finish.
- High-impact resistant, UV-stabilized polycarbonate clear lens.
- Corrosion-resistant enclosure engineering grade silicone gasket.
- Knockout's provided for conduit feed applications.
- EZ snap-out Chevron directional indicators.


### OPTIONS

- HTR: Optional internal heater for cold temperature (-9°C - 40°C) applications.

### WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

### DIMENSIONS

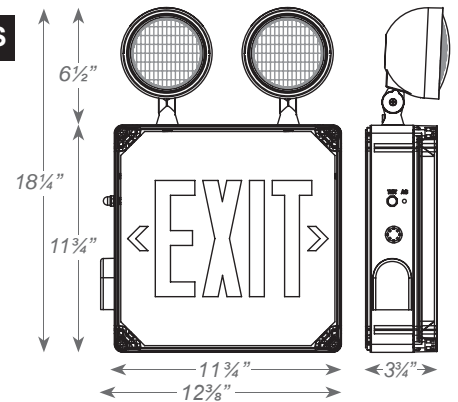

### ORDERING INFORMATION

Sample Part Number: **CWLXTEREM**

Special voltage options available. Check with your Vision Lighting, Inc. Representative.

Model	No. of FACES	LETTER COLOR	BATTERY	OPTIONS
CWLXTE	(blank) Single Face (standard)	R Red G Green	EM Battery Backup (standard)	HTR Internal Heater