

BRK-LEDARC8 8" LED Architectural Downlight



Project:	
Type:	
Catalog #:	

STANDARD



FEATURES

- Available in 4000k.*
- Long-life LEDs provide at least 70% of initial lumen output (L_{70}) for 50,000 hours of operation.**
- Provides 3,640 nominal lumens.
- 48 nominal watts.
- Color rendering index (R_a) > 80.
- Input voltage = 120-277V (50-60Hz).
- 0-10V dimming.
- Installs from below ceiling and secured by tension clips.
NOTE: tension clips are not provided with the luminaire.
- Flexible conduit with quick-connector is standard.
- Integral heat sink for heat disbursement.
- This device is not intended for use with emergency exits.


WARRANTY & LISTINGS

- cULus listed for damp and wet locations.
- Title 24 compliant.
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- 5-year warranty of all electronics and housing.

* Contact factory for other color temperatures and lumen packages.
** L_{70} hours are IES TM-21-11 calculated hours.



DIMENSIONS

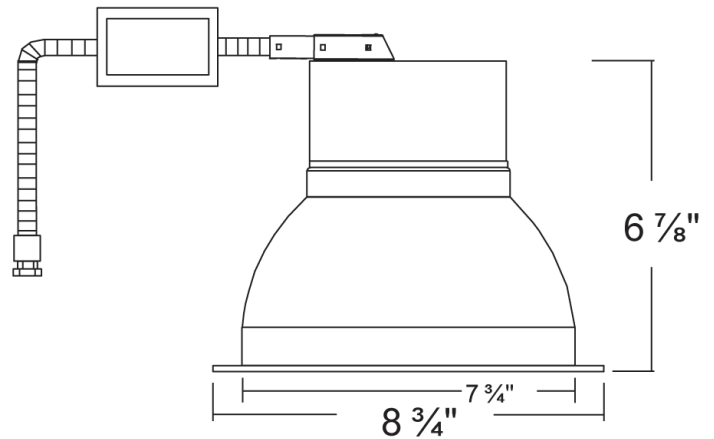

ORDERING INFORMATION

MODEL	DESCRIPTION
BRK-LED48ARC8-4K	8" ARCHITECTURAL RETROFIT, 4000K, 3,640 LUMENS, 48 WATTS

Specifications and dimensions subject to change without notice.