

BRK-LED350 3.5" LED Trims



Project:	
Type:	
Catalog #:	

STANDARD



FEATURES

- Available in 3000k and 4000k color temperatures.*
- Long-life LEDs provide at least 70% of initial lumen output (L_{70}) for 50,000 hours of operation.**
- Provides at least 560 nominal lumens.
- 9 nominal watts.
- Color rendering index (R_a) > 90.
- 120 AC voltage is standard.
- Dimmable down to 10% with most line voltage dimmers.
- Die-cast housing painted white.
- Easy installation in new construction or remodel applications. Equipped with torsion springs.
- E26 medium screw-base (Edison) connector comes standard.
- Compatible with 3.25-3.5" ceiling cut-outs.
- Compatible with BL350 series.
- This device is not intended for use with emergency exits.


WARRANTY & LISTINGS

- cULus listed for damp and wet locations.
- Energy Star qualified.
- Title 24 compliant.
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- 5-year warranty of all electronics and housing.

* Contact factory for other color temperatures and lumen packages.
 ** L_{70} hours are IES TM-21-11 calculated hours.



DIMENSIONS

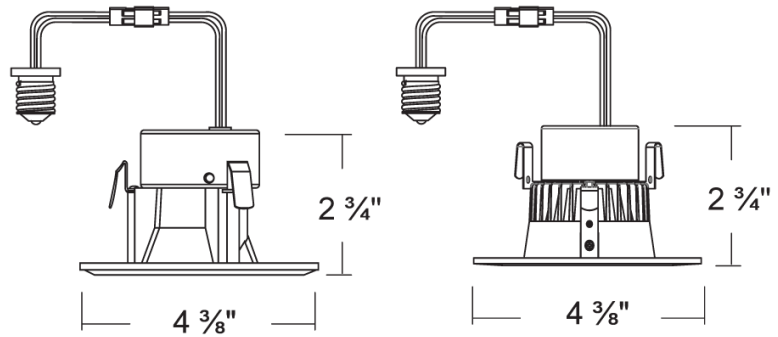

ORDERING INFORMATION

MODEL	DESCRIPTION
BRK-LED350-BW-3K	3.5" LED ROUND BAFFLE TRIM, 3000K
BRK-LED350-BW-4K	3.5" LED ROUND BAFFLE TRIM, 4000K
BRK-LED350-BWSQ-3K	3.5" LED SQUARE BAFFLE TRIM, 3000K

Specifications and dimensions subject to change without notice.