

BRK-LED4-BW

4" LED Trims



Project:	
Type:	
Catalog #:	

STANDARD



FEATURES

- Available in 2700k, 3000k, 3500k, 4000k, and 5000k color temperatures.*
- Long-life LEDs provide at least 70% of initial lumen output (L_{70}) for 50,000 hours of operation.**
- Provides up to 730 nominal lumens.
- 8 nominal watts.
- Color rendering index (R_a) > 80.***
- 120 (50-60Hz) AC voltage is standard.
- Dimmable down to 10% with most line voltage dimmers.
- Thermoplastic construction.
- Easy installation in new construction or remodel applications. Equipped with torsion springs.
- Compatible with insulated, non-insulated, and air-tight ceilings.
- E26 medium screw-base (Edison) connector comes standard.
- Compatible with BL4ICLED series.
- This device is not intended for use with emergency exits.


WARRANTY & LISTINGS

- cETLus listed for wet locations.
- Energy Star qualified.
- Title 24 compliant (BRK-LED4-BW-3-ECO-C only).
- Complies with FCC Part 15, class B.
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- 5-year warranty of all electronics and housing.

* Contact factory for other color temperatures and lumen packages.
 ** L_{70} hours are IES TM-21-11 calculated hours.
 *** BRK-LED4-BW-3-ECO-C = (R_a) > 90.



DIMENSIONS

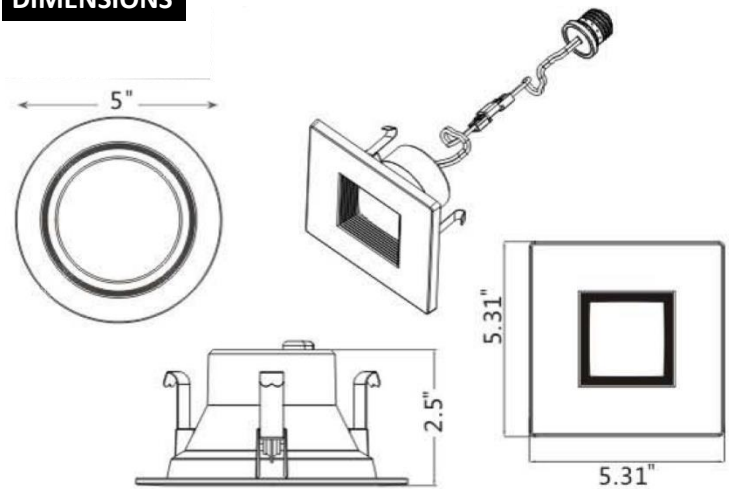

ORDERING INFORMATION

Example: BRK-LED4-BW-3-ECO

Series	Trim Type		Color Temperature (lumen output)		Accessories (Order Separately)	
	BW	Baffle	27-ECO	2700K (550 lm)	LED4-TRMPLT-ECO-SQ	Square snap trim
BRK-LED4			3-ECO	3000K (630 lm)	LED4-TRMPLT-ECO-SPWHT	Specular white snap trim
			35-ECO	3500K (645 lm)	LED4-TRMPLT-ECO-BK	Black snap trim
			4-ECO	4000K (665 lm)	LED4-TRMPLT-ECO-N	Nickle snap trim
			5-ECO	5000K (730 lm)	LED4-TRMPLT-ECO-BZ	Bronze snap trim
			3-ECO-C	3000K (580 lm)		