# BRK-LED56-BW 5/6" LED Trims



Project:	
Type:	
Catalog #:	

#### STANDARD












## **FEATURES**

- Available in 2700k, 3000k, 3500k, 4000k, and 5000k color temperatures.1
- Long-life LEDs provide at least 70% of initial lumen output (L<sub>70</sub>) for 50,000 hours of operation.2
- Provides up to 1,200 nominal lumens.
- BRK-LED56-BW = 12 nominal watts. BRK-LED56-16BW = 16 nominal watts.
- Color rendering index  $(R_a) > 80.3$
- 120 (50-60Hz) AC voltage is standard.
- Power factor > 0.90.
- Dimmable down to 10% with most line voltage dimmers.
- Thermoplastic construction.
- Easy installation in new construction or remodel applications. Equipped with torsion springs.
- Compatible with insulated, non-insulated, and air-tight ceilings (Type IC).
- E26 medium screw-base (Edison) connector comes standard.
- Compatible with BL9ICLED series housings.
- This device is not intended for use with emergency exits.

### **WARRANTY & LISTINGS**

- cETLus listed for wet locations.
- Title 24 compliant (BRK-LED56-16BW-27-ECO-C only).
- Complies with FCC Part 15, class B.
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- 5-year warranty of all electronics and housing.

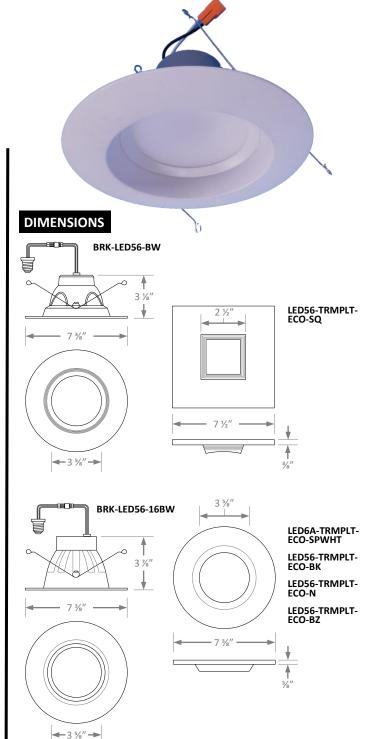

## ORDERING INFORMATION

ONDERING INFORMATION				Ī			
Example: BRK-LED56-BW-5-ECO	Series	Trim Type		Color Temperature (lumen output)		Accessories (Order Separately)	
	BRK-LED56	BW	Baffle	27-ECO	2700K (900 lm)	LED56-TRMPLT-ECO-SQ	Square snap trim
				3-ECO	3000K (960 lm)	LED6A-TRMPLT-ECO-SPWHT	Specular white snap trim
				35-ECO	3500K (980 lm)		
				4-ECO	4000K (1,000 lm)	LED56-TRMPLT-ECO-BK	Black snap trim
				5-ECO	5000K (1,060 lm)		
				3-ECO-C	3000K (780 lm)	LED56-TRMPLT-ECO-N	Nickle snap trim
	BRK-LED56	16BW	16 watt	27-ECO-C	2700K (1,200 lm)	LED56-TRMPLT-ECO-BZ	Bronze snap trim

Contact factory for other color temperatures and lumen packages.

<sup>&</sup>lt;sup>2</sup> L<sub>70</sub> hours are IES TM-21-11 calculated hours.

<sup>3</sup> BRK-LED56-16BW-27-ECO-C = CRI ≥ 90.