

# BRK-LED56-BW-V2

# 5/6" LED Trims



Project:	
Type:	
Catalog #:	

## STANDARD



## FEATURES

- Available in 2700k, 3000k, 3500k, 4000k, and 5000k color temperatures.\*
- Long-life LEDs provide at least 70% of initial lumen output ( $L_{70}$ ) for 50,000 hours of operation.\*\*
- Provides up to 860 nominal lumens.
- 12 nominal watts.
- Color rendering index ( $R_a$ ) > 80.
- 120 (60Hz) AC voltage is standard.
- Power factor > 0.90.
- Dimmable down to 10% with most line voltage dimmers.
- Thermoplastic construction.
- Easy installation in new construction or remodel applications. Equipped with torsion springs.
- Compatible with insulated, non-insulated, and air-tight ceilings.
- E26 medium screw-base (Edison) connector comes standard.
- Compatible with BL9ICLED series housings.
- This device is not intended for use with emergency exits.


## WARRANTY & LISTINGS

- cETLus listed for wet locations.
- Operating temperatures of  $-20^{\circ}\text{C}$  to  $40^{\circ}\text{C}$  ( $-4^{\circ}\text{F}$  to  $104^{\circ}\text{F}$ ).
- Complies with FCC Part 15, class B.
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- 5-year warranty of all electronics and housing.

\* Contact factory for other color temperatures and lumen packages.  
 \*\*  $L_{70}$  hours are IES TM-21-11 calculated hours.



## DIMENSIONS

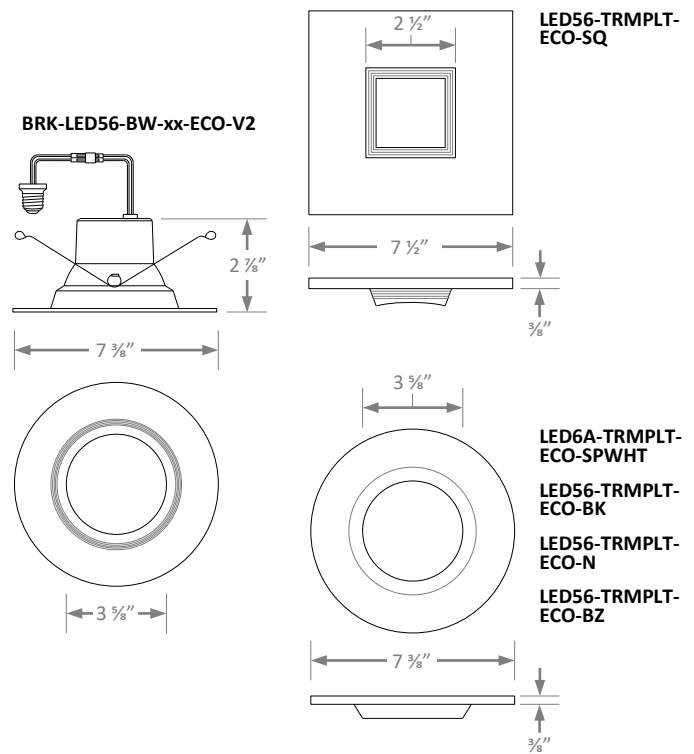

## ORDERING INFORMATION

Example: BRK-LED56-BW-3-ECO-V2

Series	Trim Type	Color Temperature (lumen output)	Accessories (Order Separately)
BRK-LED56	BW   Baffle	27-ECO-V2   2700K (800 lm)	LED56-TRMPLT-ECO-SQ   Square snap trim
		3-ECO-V2   3000K (820 lm)	LED6A-TRMPLT-ECO-SPWHT   Specular white snap trim
		35-ECO-V2   3500K (830 lm)	LED56-TRMPLT-ECO-BK   Black snap trim
		4-ECO-V2   4000K (840 lm)	LED56-TRMPLT-ECO-N   Nickel snap trim
		5-ECO-V2   5000K (860 lm)	LED56-TRMPLT-ECO-BZ   Bronze snap trim

Specifications and dimensions subject to change without notice.