

# BRK-LED56-GR 5/6" LED Gimbal Trims



Project:	
Type:	
Catalog #:	

## STANDARD



## FEATURES

- Available in 2700k, 3000k, and 4000k color temperatures.\*
- Long-life LEDs provide at least 70% of initial lumen output ( $L_{70}$ ) for 50,000 hours of operation.\*\*
- Provides up to 1,050 nominal lumens.
- 14 nominal watts.
- Color rendering index ( $R_a$ ) > 80.
- 120 (50-60Hz) AC voltage is standard.
- Power factor  $\geq 0.90$ .
- Dimmable down to 10% with most line voltage dimmers.
- Thermoplastic construction.
- Easy installation in new construction or remodel applications. Equipped with torsion springs.
- Compatible with insulated, non-insulated, and air-tight ceilings.
- E26 medium screw-base (Edison) connector comes standard.
- Compatible with BL9ICLED series.
- This device is not intended for use with emergency exits.

## WARRANTY & LISTINGS

- cETLus listed for damp locations.
- Energy Star qualified.
- Complies with FCC Part 15, class B.
- 5-year warranty of all electronics and housing.

\* Contact factory for other color temperatures and lumen packages.


\*\*  $L_{70}$  hours are IES TM-21-11 calculated hours.



## COMPATIBLE DIMMERS

MANUFACTURER & SERIES	PART NUMBER
Lutron Maestro C-L	MACL-153MR
Lutron Skylark C-L	SCL-153P
Leviton Sureslide	6674
Lutron	PD-6WCL
Legrand Harmony	HCL453PTCCCV6

## DIMENSIONS

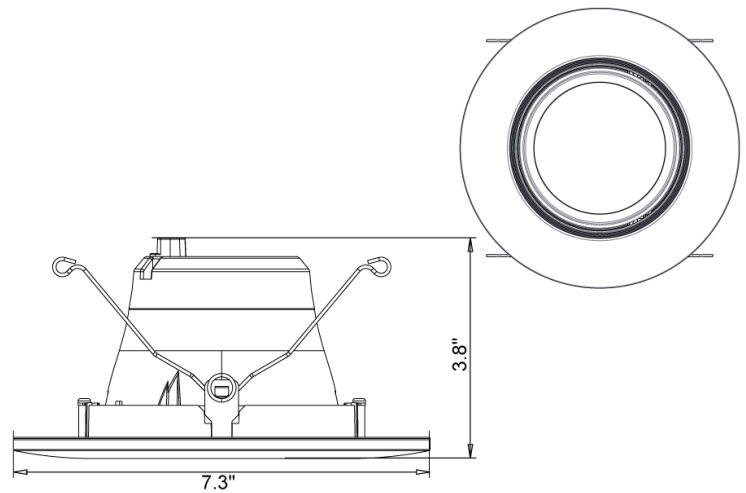

## ORDERING INFORMATION

Example: BRK-LED56-GR-27K-ECO

Series	Trim Type		Color Temperature (lumen output)	
			27K-ECO	3000K (975 lm)
BRK-LED56	GR	Gimbal	27K-ECO	2700K (975 lm)
			3K-ECO	3000K (975 lm)
			4K-ECO	4000K (1,050 lm)

Specifications and dimensions subject to change without notice.