

# BRK-LED6ICN 6" LED Trims – Self Contained



Project:	
Type:	
Catalog #:	

## STANDARD



## FEATURES

- Available in 2700K, 3000k, 3500K, 4000K, and 5000k color temperatures.\*
- Long-life LEDs provide at least 70% of initial lumen output ( $L_{70}$ ) for 50,000 hours of operation.\*\*
- Provides 850 nominal lumens.
- 9.5 nominal watts.
- Color rendering index ( $R_a$ ) > 80.
- 120 AC voltage (50-60Hz) is standard.
- Power factor > 0.90.
- Dimmable down to 10% with most line voltage dimmers.
- Thermoplastic construction.
- Easy installation in new construction or retrofit applications. Equipped with torsion springs.
- Rated for insulated, non-insulated, and air-tight applications.
- Type IC. Access above ceiling required.
- Compatible with 5.75" ceiling cut-outs.
- This device is not intended for use with emergency exits.

## WARRANTY & LISTINGS

- cETLus listed for wet locations.
- Energy Star qualified.
- Complies with FCC Part 15, class B.
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- 5-year warranty of all electronics and housing.

\* Contact factory for other color temperatures and lumen packages.


\*\*  $L_{70}$  hours are IES TM-21-11 calculated hours.



## COMPATIBLE DIMMERS

MANUFACTURER & SERIES	PART NUMBER
Lutron Maestro C-L	MACL-153MR
Lutron Skylark C-L	SCL-153P
Leviton Sureslide	6674
Lutron	PD-6WCL
Legrand Harmony	HCL453PTCCCV6
Lutron Diva	DV600P
Lutron Diva	DVCL-153P

## DIMENSIONS

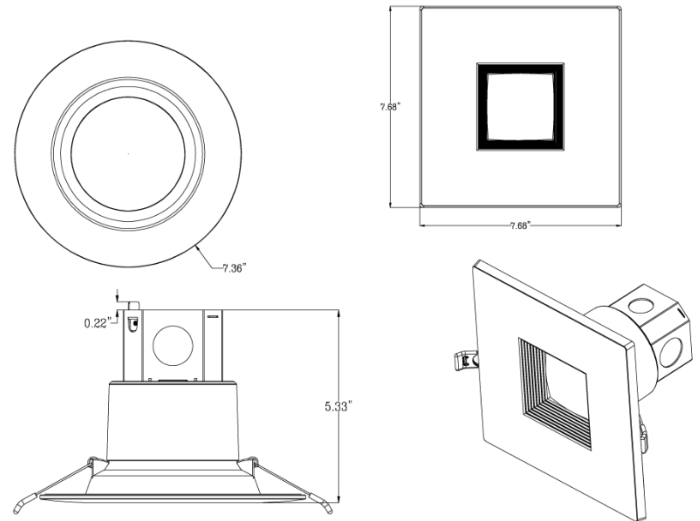

## ORDERING INFORMATION

Example: BRK-LED6ICN-9.5W-27K-ECO

Series	Watts	Color Temperature		Accessories (Order Separately)	
BRK-LED6ICN	9.5W	27K-ECO	2700K	LED56-TRMPLT-ECO-SQ	Square snap trim
		3K-ECO	3000K	LED6A-TRMPLT-ECO-SPWHT	Specular white snap trim
		35K-ECO	3500K	LED56-TRMPLT-ECO-BK	Black snap trim
		4K-ECO	4000K	LED56-TRMPLT-ECO-N	Nickle snap trim
		5K-ECO	5000K	LED56-TRMPLT-ECO-BZ	Bronze snap trim

Specifications and dimensions subject to change without notice.