

LED-FSP-WH LED Flat Downlight - Square



Project:	
Type:	
Catalog #:	

STANDARD




FEATURES

- Available in 3000k (warm white), 4000k (neutral white), and 5000k (cool white) color temperatures.
- Long-life LEDs provide at least 70% of initial lumen output (L_{70}) for 50,000 hours of operation.**
- LED-FSP-WH4 provides 530 nominal lumens and LED-FSP-WH6 provides 1,030 nominal lumens.
- LED-FSP-WH4 = 11 nominal watts and LED-FSP-WH6 = 16 nominal watts.
- Color rendering index (R_a) > 90.
- Universal 120-277 (50-60Hz) AC voltage is standard.
- Power factor ≥ 0.90 .
- Total harmonic distortion < 20%.
- Dimmable down to 10% with most line voltage dimmers (120V only).
- Painted steel housing.
- Easy installation in new construction or remodel applications. Equipped with torsion springs.
- For use with insulated ceilings (Type IC).
- Compatible with 4.38"-6.62" square ceiling cut-outs.
- This device is not intended for use with emergency exits.


WARRANTY & LISTINGS

- cULus listed for wet locations.
- Energy Star qualified.
- Complies with FCC Part 15, class A.
- Complies with RoHS (Restriction on Hazardous Substances) requirements.
- 5-year warranty of all electronics and housing.

* Contact factory for other color temperatures and lumen packages.
 ** L_{70} hours are IES TM-21-11 calculated hours.

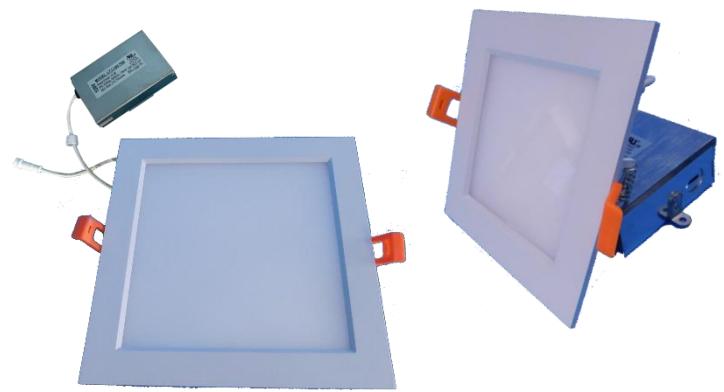

DIMENSIONS

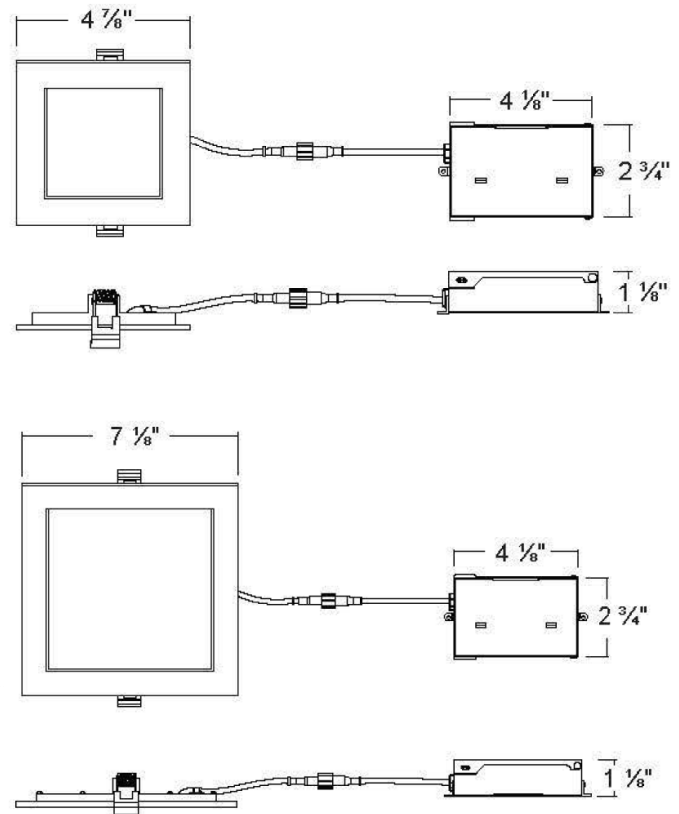

ORDERING INFORMATION

Example: LED-FSP-WH6-5K

Series	Size		Color Temperature		Accessories (Order Separately)	
	Model	Depth	3K	5000K	Part Number	Description
LED-FSP	WH4	4"	4K	4000K	BL4FSP-MP	4" mounting plate - square
	WH6	6"	5K	5000K	BL6FSP-MP	6" mounting plate - square
			4K	4000K		

Specifications and dimensions subject to change without notice.