

# UTDR-KFS 4" & 6" Ultra-thin Downlight

Kelvin Field Selectable



Project:	
Type:	
Catalog #:	

## STANDARD



## FEATURES

- Field selectable 2700k (soft white), 3000k (warm white), 3500k (warm/neutral white), 4000k (neutral white), and 5000k (cool white) color temperatures.\*
- Long-life LEDs provide at least 70% of initial lumen output ( $L_{70}$ ) for 137,000 hours of operation.\*\*
- Color rendering index ( $R_a$ ) > 90.
- UTDR-4 provides 660 nominal lumens from 9 watts and UTDR-6 provides 1,000 nominal lumens from 13 watts.
- Input voltage = 120V 50-60Hz
- Power factor > 0.90.
- Total harmonic distortion < 20%.
- Triac dimming.
- Steel housing, painted white. Polystyrene lens.
- Easy installation in new construction or retrofit applications.
- Compatible with 4" (UTDR-4) and 6" (UTDR-6) ceiling cut-outs.
- Type IC, inherently protected. Access above ceiling required.
- This device is not intended for use with emergency exits.

## WARRANTY & LISTINGS

- cULus listed for wet locations.
- Compatible for new construction and retrofit applications.
- Complies with FCC Part 15, class B.
- Complies with IEC61000-4-5, input transient protection (0.5kV).
- 5-year warranty of all electronics and housing.


\* Contact factory for other color temperatures and lumen packages.  
 \*\*  $L_{70}$  hours are IES TM-21-11 calculated hours.



## COMPATIBLE DIMMERS

Manufacturer/Series	Model Number
Lutron/Maestro C-L	MACL-153MR
Lutron/Diva	DV-600P
Lutron	PD-6WCL
Leviton/Sureslide	6674
Leviton/Sureslide	6633-P
Leviton/Sureslide	6631
Legrand/Harmony	HCL453PTCCCV6

## DIMENSIONS

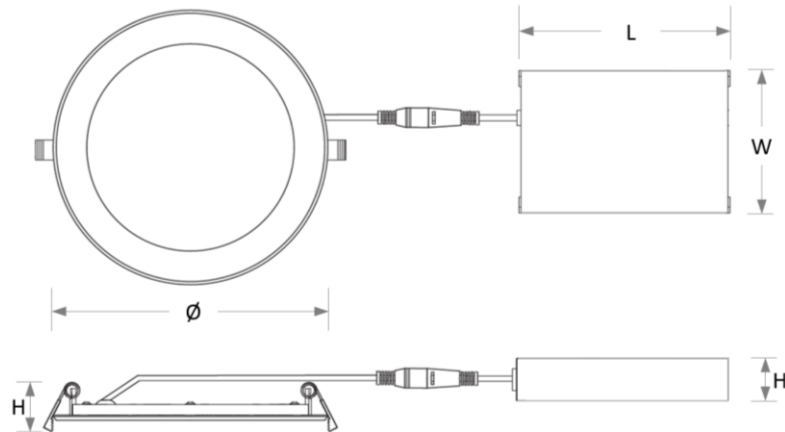

Model	Luminaire		Driver			Weight
	Diameter	Height	Length	Width	Height	
UTDR-4	4.7"	0.5"	4.5	3.0	1.3	0.8 lbs
UTDR-6	6.8"	0.5"	4.5	3.0	1.3	1 lbs

## ORDERING INFORMATION

Example: UTDR-4-7L-KFS

Series	Size & Nominal Lumen Output		Color Temperature	
	Size	Nominal Lumen Output	Color Temperature	Notes
UTDR	4-7L	700 lumens	KFS*	2700K, 3000K, 3500K, 4000K, or 5000K
	6-10L	1,000 lumens		

\*Kelvin field selectable

Specifications and dimensions subject to change without notice.